

EasyPrint mlp

Multi-Lane Traversing Thermal Transfer Printer

mlp, mlp mini and mlp X

The **EasyPrint MLP** is designed for versatility. The **EasyPrint MLP** is the ideal machine for in-line printing of batch codes, graphics, logos, sell-by dates, bar codes and other variable information. The thermal transfer technology prints directly onto packaging substrates such as poly films, foil, Tyvek®, medical paper, cartons and labels. The **EasyPrint MLP** provides solutions for multiple package coding and printing on Multivac, GEM, RapidPak, Repak, Ulma, Fargo Automation and all horizontal form, fill, seal, packaging machines.




Multiple Lane Thermal Transfer Printing for:

- | | |
|--------------------|-------------------|
| ✓ Pharmaceuticals | ✓ Processed Meats |
| ✓ Blister Packages | ✓ Cheeses |
| ✓ Syringes | ✓ Pouches |
| ✓ Sutures | ✓ And more... |
| ✓ Catheters | |


EasyPrint **mlp**

Multi Lane - Traversing Printer

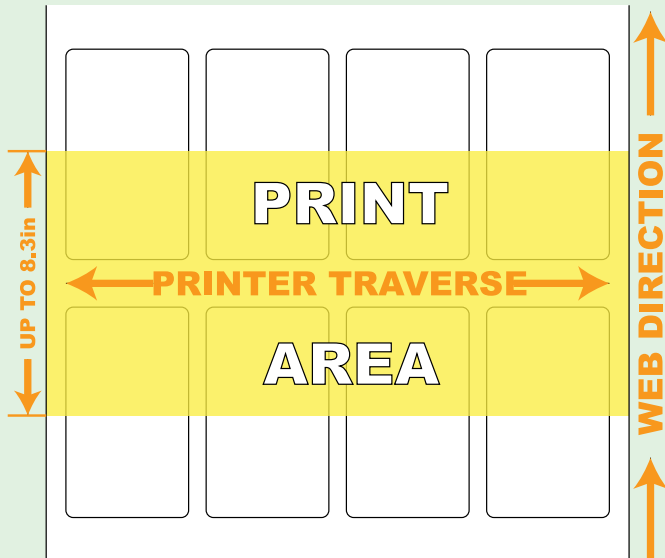

EasyPrint **MLP** split platen

Multi Lane - Multi Row - Traversing Printer

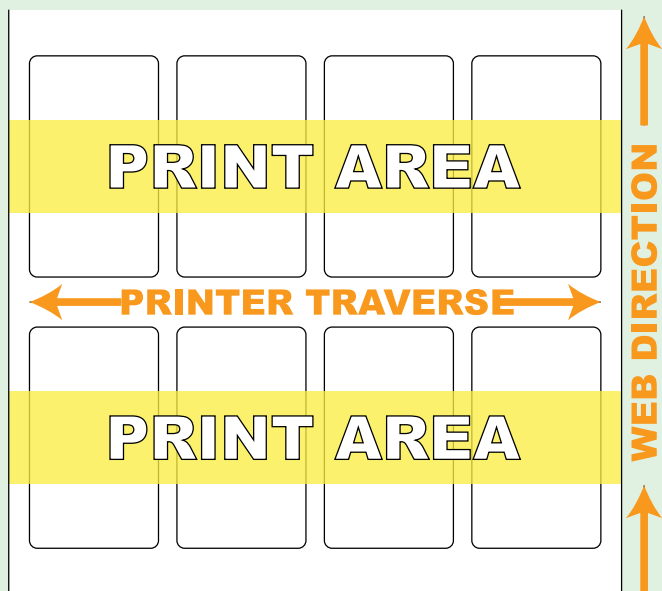

**Print Multiple Lanes & Rows
with a single sweep of the
print head.**

Features

- Ribbon Saving feature reduces ribbon waste up 50%
- Low air pressure detection maximizes print quality for critical applications.
- Carriage home position is located at operator side for easy ribbon changes.
- Floating print head provides perfect alignment to substrate for high quality printing.
- Available with 2", 5" and now 8.3" print heads.

Optional upgrade
available for any
EasyPrint MLP

**Advanced, IP-67
rated, 10.4"
touch-screen HMI**



EasyPrint mlpX

Harsh Environment Printer

The **EasyPrint mlpX** was designed to provide a versatile Thermal Transfer solution for direct package coding in Harsh Environments. The **EasyPrint mlpX** is the ideal machine for in-line printing of all the variable information required for Meat & Dairy packaging, specifically those that utilize multiple rows or columns across each package.

6 Features allow for Harsh Environment printing


- 1) A Stainless steel cover which offers more protection than the standard lexan cover
- 2) A top cover extension to prevent dripping water from entering the printer
- 3) Roller extensions on the infeed to direct the web around the extended cover
- 4) Conformally coated circuit boards to prevent damage from moisture
- 5) Sealed push buttons to prevent damage from moisture
- 6) Sealing grease in umbilical cable connector to prevent damage from moisture



EasyPrint mlpX mini

EasyPrint mlp WAS

Web Advance System

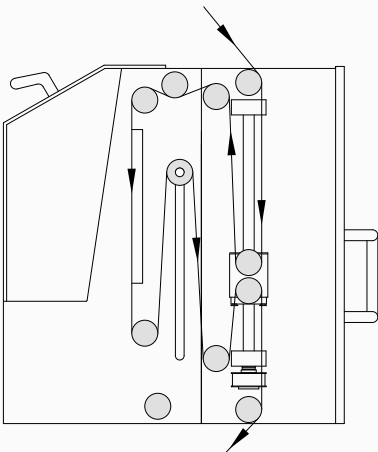

Attaches directly to an **EasyPrint mlp**, and allows for multiple rows of printing on Horizontal Form/Fill/Seal machines, without the need for additional print stations.



EasyPrint **mlp** Applications



MLP on a HFFS medical device packaging line



MLP on a VFFS



MLP printing on bottom web



MLP X on a HFFS food packaging line

Benefits of EasyPrint Thermal Transfer Printing

Saves Time and Money

Thermal transfer eliminates costly setup and downtime of changing metal or rubber type on hot stamp and competitive coders. No messy ink jet cleanup or downtime. The **EasyPrint MLP** is an easy alternative to labels and pre-printed films.

More Prints Per Ribbon

Over 51,181 3/4 inch (19.05mm) prints per ribbon. The **EasyPrint MLP** has an automatic, highly accurate ribbon advance system that minimizes ribbon usage and delivers more prints per ribbon.

High Speed

Unique electronic design enables printing at speeds up to 600mm/sec. across a web.



EasyPrint MLP - Technical Specs

| | | | |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------|
| Technology | Direct Thermal Transfer | Time/Date | Yes |
| Print Area | Up to 8.3 x 23.62in (213 x 630mm) | Memory Storage | On Board USBx2 or PC |
| Print Speed | From 25mm/sec up to 600mm/sec | Ribbon Length | 3198 ft. (975m) |
| Print Density | 300 DPI (12 dots/mm) | Communication | Serial RS 232, USB, Ethernet |
| # of lanes to print | Up to 99 | Display | 7" Color Touch Screen |
| Graphic Logos | BMP, DXF, PCX, TIF, WMF, GIF | Temperature | 41°F-104°F (5°C-40°C) |
| Bar Codes | EAN 13, EAN 8, Code 39, 2/5 interleave, UPC A, UPC E, Code 128, EAN 128, HIBC LIC 128, PZN, EAN add-on, Date Code, Data Matrix | Humidity | 10-80% without condensation |
| | | Electrical | 115/230 VAC, 50/60Hz, 400VA |
| | | Compressed Air | .353 CFM@ 95 PSI, Max (10LT/min @ 6 Bar) |



EasyPrint MLP VIDEO



EasyPrint MLP mini VIDEO



EasyPrint MLPX VIDEO



EasyPrint MLP WAS VIDEO

Rev: 3.0

331 Changebridge Road, Pine Brook, NJ 07058

phone 973-882-0202

fax 973-808-4616

www.BELL-MARK.com